
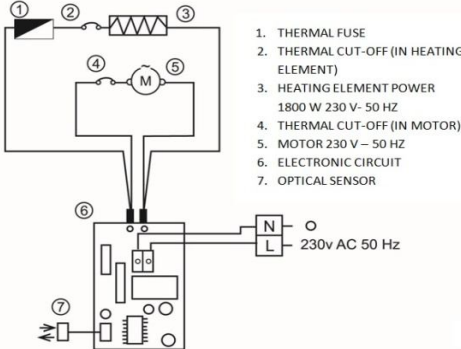




# TECHNICAL DATA SHEET

NAME	REFERENCE
OPTICAL SENSOR OPERATED HAND DRYER FUTURA	AA14000
DETAILS	
<p>HIGH QUALITY AND HIGH PERFORMANCE STANDARD HAND DRYER</p> <p>DOUBLE ELECTRICAL INSULATION</p> <p>OPTICAL SENSOR OPERATED : ACTIVATES WHEN APPROCHING HANDS</p> <p>CLASS II: GROUNDING WIRE NOT REQUIRED. DISTANCE FROM WATER POINT 0,6 mts</p> <p>HIGH QUALITY AND RESISTANCE WHITE ABS COVER</p>	
ELECTRICAL SCHEME	
 <ol style="list-style-type: none"> <li>1. THERMAL FUSE</li> <li>2. THERMAL CUT-OFF (IN HEATING ELEMENT)</li> <li>3. HEATING ELEMENT POWER 1800 W 230 V- 50 HZ</li> <li>4. THERMAL CUT-OFF (IN MOTOR)</li> <li>5. MOTOR 230 V – 50 HZ</li> <li>6. ELECTRONIC CIRCUIT</li> <li>7. OPTICAL SENSOR</li> </ol>	<b>EAN CODE</b> 8427950303432

CHARACTERISTICS				
NET (Without packaging)	DIMENSIONS (mm)	HEIGHT: 320	WIDTH: 225	DEPTH: 145
	WEIGHT (Kg)	2,915		
GROSS (with packaging)	DIMENSIONS (mm)	WEIGHT: 380	WIDTH: 290	DEPTH: 225
	WEIGHT(Kg)	3,455		
MATERIALS	COVER IN ABS INTERNAL COMPONENTS MADE OF ABS AND POLYCARBONATE V0			
COLOUR / FINISH	WHITE COVER - GREY AIR OUTLET GRILLE			
ELECTRICAL FEATURES	VOLTAGE: 230V. AC FREQUENCY: 50 Hz. CONSUMPTION: 8,5 Amp. MOTOR POWER: 140 W. HEATING ELEMENT POWER: 1820 W. TOTAL POWER: 1960 W. MOTOR RPM: 2800		AIRSPEED : 68 Km/HOUR EFFECTIVE AIR FLOW: 250 m <sup>3</sup> /HOUR SOUND PRESSURE: 58 Db. AIR TEMPERATURE: 55 °C ( at a distance of 10 cm) ELECTRICAL INSULATION: CLASS II CERTIFICATIONS: CE, TÜV AND GS PROTECTION RATIO : IPX1	
FIXING SYSTEM	BY MEANS OF FOUR SCREWS AND FOUR WALL PLUGS - INCLUDED			
PACKAGING	SINGLE UNIT PACKAGING		Approved by : Quality Control Dept  DATE: 12/05/2015	