
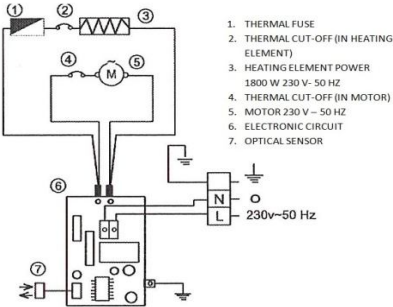




# TECHNICAL DATE SHEET

NAME	REFERENCE	
OPTICAL SENSOR OPERATED HAND DRYER "FUTURA" STAINLESS STEEL BRIGHT FINISH	AA16000	
DESCRIPTION		
HIGH QUALITY AND HIGH PERFORMANCE STANDARD HAND DRYER BRIGHT STAINLESS STEEL COVER OF HIGH QUALITY OPTICAL SENSOR OPERATED : ACTIVATES WHEN APPROCHING HANDS SECURITY SYSTEM WITH TIMER EXCELLENT PRICE-PERFORMANCE RATIO		
ELECTRICAL SCHEME		
 <p>1. THERMAL FUSE 2. THERMAL CUT-OFF (IN HEATING ELEMENT) 3. HEATING ELEMENT POWER 1800 W 230 V - 50 HZ 4. THERMAL CUT-OFF (IN MOTOR) 5. MOTOR 230 V - 50 HZ 6. ELECTRONIC CIRCUIT 7. OPTICAL SENSOR</p>	<th>EAN CODE</th>	EAN CODE
	8427950304194	

CHARACTERISTICS				
NET (Without packaging)	DIMENSIONS (mm)	HEIGHT: 318	WIDTH: 226	DEPTH: 145
	WEIGHT (Kg)	3,585		
GROSS (with packaging)	DIMENSIONS (mm)	HEIGHT: 380	WIDTH: 290	DEPTH: 225
	WEIGHT (Kg)	4,110		
MATERIALS	COVER : STAINLESS STEEL AISI 304 INTERNAL ELEMENTS: ABS AND POLYCARBONATE "VO"			
COLOUR / FINISH	COVER: BRIGHT STAINLESS STEEL AIR OUTLET GRILLE: BLACK			
ELECTRICAL FEATURES	VOLTAGE: 230V. AC	AIRSPEED: 68 Km/HOUR		
	FREQUENCY: 50 Hz.	EFFECTIVE AIRFLOW: 250 m <sup>3</sup> /HOUR		
CONSUMPTION: 8,5 Amp.	SOUND PRESSURE: 58 Db.			
MOTOR POWER: 140 W.	AIR TEMPERATURE: 55 °C (at a distance of 10 cm)			
HEATING ELEMENT POWER: 1820 W.	ELECTRICAL INSULATION: CLASS I			
TOTAL POWER: 1960 W.	CERTIFICATIONS: CE, TÜV AND GS			
MOTOR RPM: 2800	PROTECTION RATIO: IPX1			
FIXING	BY MEANS OF FOUR SCREWS AND FOUR WALL PLUGS- INCLUDED			
PACKAGING	SINGLE UNIT PACKAGING		Approved by: Quality Control Dept	
			DATE 12/05/2015	