



## EU-KONFORMITÄTSERKLÄRUNG

Die alleinige Verantwortung für die Ausstellung dieser Konformitätserklärung trägt der Hersteller.

<b>Name und Adresse des Herstellers:</b>	JIANGMEN YANYANG TRADING CO.,LTD No.1,4th Floor,Building 2,No.18 Xinyi Road,Jianghai District,Jiangmen City,Guangdong Province,China
<b>Produktbezeichnung</b>	Filtering Half Mask
<b>Modell- / Seriennummer</b>	YY0525/2163-PPE-834
<b>Angewandte Verordnung:</b>	Personal Protective Equipment Regulation (EU) 2016/425
<b>Benannte Stelle für die EU-Typprüfung (Modul B)</b>	NB 2163
<b>Zertifikat-Nr. (Modul B)</b>	2163-PPE-834
<b>Benannte Stelle für die EU-Typprüfung (Modul C2)</b>	NB 2163
<b>Zertifikat-Nr. (Modul C2)</b>	2163-PPE-834/01

Wir erklären hiermit, dass die hier beschriebene Persönliche Schutzausrüstung (PSA) gemäß den uns vorliegenden Prüfberichten und Bescheinigungen den Bestimmungen der Verordnung (EU) 2016/425 entspricht. Die Anforderungen der EN 149:2001+A1:2009 sind erfüllt.

Unterzeichnet für und im Namen des  
Herstellers von

Datum der Ausstellung: December 17<sup>th</sup>, 2020

Titel des Unterzeichners:

Unterschrift:

General Manager.

## EU TYPE EXAMINATION CERTIFICATE

**Certificate No: 2163-PPE-834**

Respiratory protective devices, filtering half masks to protect against particles manufactured by  
**JIANGMEN YANYANG TRADING CO., LTD.**  
No.1, 4th Floor, Building 2, No. 18 Xinyi Road, Jianghai District, Jiangmen City, Guangdong  
Province, China  
are tested and evaluated according to

**EN 149:2001 + A1:2009 Respiratory Protective Devices -  
Filtering Half Masks to Protect Against Particles -  
Requirements, Testing, Marking**

Based on the type examination conducted with the evaluation of test reports, technical file according to Personal Protective Equipment Regulation (EU) 2016/425 Annex 5, it is approved that the product meets the requirements of the regulation.

**Product Definition**

**Brand Name:** CRDLIGHT **Model:** YY0525  
Filtering half mask  
**Classification:** FFP2 NR

Here by the manufacturer is allowed to use notified body number (2163) and can fix CE mark, as shown below, on the Category III product models given above, with;

- Issuing an appropriate EU Declaration of Conformity according to **Personal Protective Equipment Regulation (EU) 2016/425 Annex 9.**
- Ongoing successful performance in fulfilment of the requirements set out in **Personal Protective Equipment Regulation (EU) 2016/425** and harmonised standards, ensured by assessments based on **Annex 7 (Module C2)** or **Annex 8 (Module D)** of the regulation no later than 1 year from the beginning of serial production

This certificate is initially issued on **25/06/2020** and will be valid for 5 years, if there is no change in the relevant harmonised standard affecting the essential health and safety requirements.



**Suat KACMAZ**  
UNIVERSAL CERTIFICATION  
Director



**TECHNICAL ASSESSMENT REPORT**

**REPORT DATE / NO:** 25.06.2020 / 2163-KKD-834

**Manufacturer:** JIANGMEN YANYANG TRADING CO., LTD.

**Address:** No.1, 4th Floor, Building 2, No. 18 Xinyi Road, Jianghai District, Jiangmen City, Guangdong Province, China

This report is for the, given above, manufacturer prepared according to the test results obtained from Trust Right Testing and Certification Service (Zhongshan) Ltd, accredited by IAS (International Accreditation Service), signatory to ILAC MRA, with number TL-861 for the product identified below, dated 15.06.2020 with Serial Id R20200062 based on EN 149: 2001 + A1: 2009 standard and the technical file dated 19 June, 2020 Version 01 provided by the manufacturer.

The technical file of the manufacturer, and risk evaluation against the essential health safety requirements and the test report evaluated for their relation with Essential Requirements of Personal Protective Equipment Regulation and found to be appropriate.

This report is an annex and an integral part of the EU Type Examination Certificate issued to the manufacturer. The test results and issued certificate belongs only to the tested model. The technical report consists of a total of 6 pages.

**Product Description:** Particle Filtering Half Mask

**Classification:** FFP2 NR

**Brand Name:** CRDLIGHT **Model:** YY0525



**THE CLAUSES OF EN 149: 2001 + A1: 2009 STANDARD RELATED TO EUROPEAN UNION DIRECTIVE  
EU 2016/425 REQUIREMENTS**

**1.1. Design principles**

**1.1.1. Ergonomics**

PPE must be so designed and manufactured that in the foreseeable conditions of use for which it is intended the user can perform the risk related activity normally whilst enjoying appropriate protection of the highest possible level.

**1.1.2. Levels and classes of protection**

**1.1.2.1. Highest level of protection possible**

The optimum level of protection to be taken into account in the design is that beyond which the constraints by the wearing of the PPE would prevent its effective use during the period of exposure to the risk or normal performance of the activity.

**1.1.2.2. Classes of protection appropriate to different levels of risk**

Where differing foreseeable conditions of use are such that several levels of the same risk can be distinguished, appropriate classes of protection must be taken into account in the design of the PPE.

**1.2. Innocuousness of PPE**

**1.2.1. Absence of risks and other inherent nuisance factors**

PPE must be so designed and manufactured as to preclude risks and other nuisance factors under foreseeable conditions of use.

**1.2.1.1. Suitable constituent materials**

The materials of which the PPE is made, including any of their possible decomposition products, must not adversely affect the health or safety of users.

**1.2.1.2. Satisfactory surface condition of all PPE parts in contact with the user**

Any part of the PPE that is in contact or is liable to come into contact with the user when the PPE is worn must be free of rough surfaces, sharp edges, sharp points and the like which could cause excessive irritation or injuries

**1.2.1.3. Maximum permissible user impediment**

Any impediment caused by PPE to movements to be made, postures to be adopted and sensory perception must be minimized; nor must PPE cause movements which endanger the user or other persons.

**1.3 Comfort and effectiveness**

**1.3.1. Adaptation of PPE to user morphology**

PPE must be designed and manufactured in such a way as to facilitate its correct positioning on the user and to remain in place for the foreseeable period of use, bearing in mind ambient factors, the actions to be carried out and the postures to be adopted. For this purpose, it must be possible to adapt the PPE to fit the morphology of the user by all appropriate means, such as adequate adjustment and attachment systems or the provision of an adequate range of sizes.

**1.3.2. Lightness and design strength**

PPE must be as light as possible without prejudicing design strength and efficiency.

Apart from the specific additional requirements which they must satisfy in order to provide adequate protection against the risks in question (see 3), PPE must be capable of withstanding the effects of ambient phenomena inherent under the foreseeable conditions of use

**1.4. Information supplied by the manufacturer**

The notes that must be drawn up by the former and supplied when PPE is placed on the market must contain all relevant information on:

- a) In addition to the name and address of the manufacturer and/or his authorized representative established in the Community
- b) Storage, use, cleaning, maintenance, servicing and disinfection, cleaning, maintenance or disinfectant protection recommended by manufacturers must have no adverse effect on PPE or users when applied in accordance with the relevant instructions;
- c) Performance as recorded during technical tests to check the levels or classes of protection provided by the PPE in question;
- d) Suitable PPE accessories and the characteristics of appropriate spare parts;
- e) The classes of protection appropriate to different levels of risk and the corresponding limits of use;
- f) The obsolescence deadline/period of obsolescence of PPE or certain of its components;
- g) The type of packaging suitable for transport;
- h) The significance of any markings (see 2.12)
- i) Where appropriate the references of the Directives applied in accordance with Article 5(6) (b);
- j) The name, address and identification number of the notified body involved in the design stage of the PPE

These notes, which must be precise and comprehensible, must be provided at least in the official language(s) of the member state of destination

## 2. ADDITIONAL REQUIREMENTS COMMON TO SEVERAL CLASSES OR TYPES OF PPE

### 2.1. PPE incorporating adjustment systems

If PPE incorporates adjustment systems, the latter must be designed and manufactured so that, after adjustment, they do not become undone unintentionally in the foreseeable conditions of use.

### 2.3. PPE for the face, eyes and respiratory system

Any restriction of the user's face, eyes, field of vision or respiratory system by the PPE shall be minimised.

The screens for those types of PPE must have a degree of optical neutrality that is compatible with the degree of precision and the duration of the activities of the user.

If necessary, such PPE must be treated or provided with means to prevent misting-up.

Models of PPE intended for users requiring sight correction must be compatible with the wearing of spectacles or contact lenses.

### 2.4. PPE subject to ageing

If it is known that the design performance of new PPE may be significantly affected by ageing, the month and year of manufacture and/or, if possible, the month and year of obsolescence must be indelibly and unambiguously marked on each item of PPE placed on the market and on its packaging.

If the manufacturer is unable to give an undertaking with regard to the useful life of the PPE, his instructions must provide all the information necessary to enable the purchaser or user to establish a reasonable obsolescence month and year, taking into account the quality level of the model and the effective conditions of storage, use, cleaning, servicing and maintenance.

Where appreciable and rapid deterioration in PPE performance is likely to be caused by ageing resulting from the periodic use of a cleaning process recommended by the manufacturer, the latter must, if possible, affix a marking to each item of PPE placed on the market indicating the maximum number of cleaning operations that may be carried out before the equipment needs to be inspected or discarded. Where such a marking is not affixed, the manufacturer must give that information in his instructions.

### 2.6. PPE for use in potentially explosive atmospheres

PPE intended for use in potentially explosive atmospheres must be designed and manufactured in such a way that it cannot be the source of an electric, electrostatic or impact-induced arc or spark likely to cause an explosive mixture to ignite.

### 2.8. PPE for intervention in very dangerous situations

The instructions supplied by the manufacturer with PPE for intervention in very dangerous situations must include, in particular, data intended for competent, trained persons who are qualified to interpret them and ensure their application by the user.

The instructions must also describe the procedure to be adopted in order to verify that PPE is correctly adjusted and functional when worn by the user.

Where PPE incorporates an alarm which is activated in the absence of the level of protection normally provided, the alarm must be designed and placed so that it can be perceived by the user in the foreseeable conditions of use.

### 2.9. PPE incorporating components which can be adjusted or removed by the user

Where PPE incorporates components which can be attached, adjusted or removed by the user for replacement purposes, such components must be designed and manufactured so that they can be easily attached, adjusted and removed without tools.

### 2.12. PPE bearing one or more identification or recognition marks directly or indirectly relating to health and safety

The identification or recognition marks directly or indirectly relating to health and safety affixed to these types or classes of must preferably take the form of harmonized pictograms or ideograms and must remain perfectly legible throughout the foreseeable useful life of the PPE. In addition, these marks must be complete, precise and comprehensible so as to prevent any misinterpretation; in particular, where such marks incorporate words or sentences, the latter must appear in the official language(s) of the Member State where the equipment is to be used.

If PPE (or a PPE component) is too small to allow all or part of the necessary marking to be affixed, the relevant information must be mentioned on the packing and in the manufacturer's notes.

## 3. ADDITIONAL REQUIREMENTS SPECIFIC TO PARTICULAR RISKS

### 3.10.1. Respiratory protection

PPE intended for the protection of the respiratory system must make it possible to supply the user with breathable air when exposed to a polluted atmosphere and/or an atmosphere having an inadequate oxygen concentration.

The breathable air supplied to the user by PPE must be obtained by appropriate means, for example after filtration of the polluted air through PPE or by supply from an external unpolluted source.

The constituent materials and other components of those types of PPE must be chosen or designed and incorporated so as to ensure appropriate user respiration and respiratory hygiene for the period of wear concerned under the foreseeable conditions of use.

The leak-tightness of the facepiece and the pressure drop on inspiration and, in the case of the filtering devices, purification capacity must keep contaminant penetration from a polluted atmosphere low enough not to be prejudicial to the health or hygiene of the user.

The PPE must bear details of the specific characteristics of the equipment which, in conjunction with the instructions, enable a trained and qualified user to employ the PPE correctly.

In the case of filtering equipment, the manufacturer's instructions must also indicate the time limit for the storage of new filters kept in their original packaging.



Technical Assessment of EN 149: 2001 + A1: 2009 Standard and other Standards it refers to, Clauses Corresponding to the (EU) 2016/425 Directive

Conforming to EN 149:2001 + A1:2009 Standard Requirements																																					
Article 5	<p><b>Classification:</b> Particle Filtering Half Mask</p> <p>The mask subject to evaluation based on the test results and technical file provided by the manufacturer is classified as; Filtering Efficiency and maximum Total Inward Leakage: Classified as FFP2</p> <p>Mask is classified for single shift use, NR</p>																																				
Article 7.4	<p><b>Packing:</b> Particle filtering half masks are packaged to protect them from contamination before use and with cardboard boxes to prevent mechanical damage. The packaging design and the product is considered to withstand the foreseeable conditions of use based on the visual inspection results given in the test report.</p>																																				
Article 7.5	<p><b>Material:</b> Materials used in particle filtering half masks, according to the simulated wearing treatment and temperature conditioning results; It is understood it withstands handling and wear over the period for which the particle filtering half mask is designed to be used, it suffered mechanical failure of the facepiece or straps, any material from the filter media released by the air flow through the filter has not constitute a hazard or nuisance for the wearer. The manufacturer declares that the materials used in manufacturing of the mask does not have an adverse affect to the health and safety of users.</p> <p>Based on the test results, the masks did not collapse when subject to simulated wearing and temarature conditioning. No nuisance situation is reported during the practical performance tests by human subjects.</p>																																				
Article 7.6	<p><b>Cleaning and Disinfection:</b> Particle filtering half mask is not designed to be as re-usable. No cleaning or disinfection procedure provided by the manufacturer.</p>																																				
Article 7.7	<p><b>Practical Performance :</b></p> <p>The test report indicates that the human subjects did not face any difficulty in performing the exercercises while they were weared by the sample masks, in walking test or work simulation tests. The wearers did not report any failure by means of head harness / straps/ earloops comfort, security of fastenings and field of vision. Also no imperfections reported during total inward tests about the comfort, field of vision and fastening issues.</p> <table border="1"> <thead> <tr> <th>Assessed Elements</th> <th>Positive</th> <th>Negative</th> <th>Requirements in accordance with EN 149:2001 + A1:2009 and Result</th> </tr> </thead> <tbody> <tr> <td>2.Head harness comfort</td> <td>2</td> <td>0</td> <td rowspan="3">Positive results are obtained from the test subjects <b>No imperfections</b></td> </tr> <tr> <td>3.Security of fastenings</td> <td>2</td> <td>0</td> </tr> <tr> <td>5.Field of vision</td> <td>2</td> <td>0</td> </tr> </tbody> </table> <p><b>Conditioning :</b> (A.R.) As Received, original</p>	Assessed Elements	Positive	Negative	Requirements in accordance with EN 149:2001 + A1:2009 and Result	2.Head harness comfort	2	0	Positive results are obtained from the test subjects <b>No imperfections</b>	3.Security of fastenings	2	0	5.Field of vision	2	0																						
Assessed Elements	Positive	Negative	Requirements in accordance with EN 149:2001 + A1:2009 and Result																																		
2.Head harness comfort	2	0	Positive results are obtained from the test subjects <b>No imperfections</b>																																		
3.Security of fastenings	2	0																																			
5.Field of vision	2	0																																			
Article 7.8	<p><b>Finish of Parts:</b> Particle filtering half masks, which are likely to come into contact with the user, do not have sharp edges and do not contain burrs.</p>																																				
Article 7.9.1	<p><b>Total Inward Leakage:</b></p> <p>The Total Inward Leakage test is conducted by 10 individual in an aerosol chamber with a walking band, and samples are taken during the condconction of the exercercises defined in the standard. The samples used in the test are subjected to the conditioning required in the standard as Temperature conditioning and as received. The face dimensions of the subjects are also reported. The measurement details for each subject and for each excersize are available in the test report.</p> <p>It was reported that;</p> <p>All 50 exercise measurement results are smaller or equal to 11%, the values varies between 6,7 % and 8,9 %</p> <p>9 out of 10 individual's arithmetic mean is smaller or equal to 8%, the values varies between 7,1 % and 8,3 %</p> <p><b>According to the reported results, the product meets the limits for FFP1 and FFP2 classification.</b></p>																																				
Article 7.9.2	<p><b>Penetration of filter material: Sodium Chloride Testing</b></p> <table border="1"> <thead> <tr> <th>Condition</th> <th>No. of Sample</th> <th>Sodium Chloride Testing 95 L/min max (%)</th> <th>Requirements in accordance with EN 149:2001 + A1:2009</th> <th>Result</th> </tr> </thead> <tbody> <tr> <td>(A.R.)</td> <td>-</td> <td>1,4</td> <td rowspan="3">FFP1 ≤ 20 %</td> <td rowspan="9">Filtering half masks fulfill the requirements of the standard EN EN 149:2001 + A1:2009 given in 7.9.2 in range of the FFP1, FFP2 classes.</td> </tr> <tr> <td>(A.R.)</td> <td>-</td> <td>1,3</td> </tr> <tr> <td>(A.R.)</td> <td>-</td> <td>1,2</td> </tr> <tr> <td>(S.W.)</td> <td>-</td> <td>1,3</td> <td rowspan="3">FFP2 ≤ 6 %</td> </tr> <tr> <td>(S.W.)</td> <td>-</td> <td>1,3</td> </tr> <tr> <td>(S.W.)</td> <td>-</td> <td>1,4</td> </tr> <tr> <td>(M.S. T.C.)</td> <td>-</td> <td>1,6</td> <td rowspan="3">FFP3 ≤ 1 %</td> </tr> <tr> <td>(M.S. T.C.)</td> <td>-</td> <td>1,6</td> </tr> <tr> <td>(M.S. T.C.)</td> <td>-</td> <td>1,5</td> </tr> </tbody> </table> <p><b>Conditioning :</b> (M.S.) Mechanical Strength (T.C.) Temperature Conditioning (A.R.) As Received, original (S.W.) Simulated wearing treatment</p> <p>95 L/min = 1,6 dm<sup>3</sup>.an<sup>-1</sup></p>	Condition	No. of Sample	Sodium Chloride Testing 95 L/min max (%)	Requirements in accordance with EN 149:2001 + A1:2009	Result	(A.R.)	-	1,4	FFP1 ≤ 20 %	Filtering half masks fulfill the requirements of the standard EN EN 149:2001 + A1:2009 given in 7.9.2 in range of the FFP1, FFP2 classes.	(A.R.)	-	1,3	(A.R.)	-	1,2	(S.W.)	-	1,3	FFP2 ≤ 6 %	(S.W.)	-	1,3	(S.W.)	-	1,4	(M.S. T.C.)	-	1,6	FFP3 ≤ 1 %	(M.S. T.C.)	-	1,6	(M.S. T.C.)	-	1,5
Condition	No. of Sample	Sodium Chloride Testing 95 L/min max (%)	Requirements in accordance with EN 149:2001 + A1:2009	Result																																	
(A.R.)	-	1,4	FFP1 ≤ 20 %	Filtering half masks fulfill the requirements of the standard EN EN 149:2001 + A1:2009 given in 7.9.2 in range of the FFP1, FFP2 classes.																																	
(A.R.)	-	1,3																																			
(A.R.)	-	1,2																																			
(S.W.)	-	1,3	FFP2 ≤ 6 %																																		
(S.W.)	-	1,3																																			
(S.W.)	-	1,4																																			
(M.S. T.C.)	-	1,6	FFP3 ≤ 1 %																																		
(M.S. T.C.)	-	1,6																																			
(M.S. T.C.)	-	1,5																																			

Penetration of filter material : Paraffin Oil Testing					
Condition	No. of Sample	Paraffin Oil Testing 95 L/min max (%)	Requirements in accordance with EN 149:2001 + A1:2009	Result	
(A.R.)	-	3,0	FFP1 ≤ 20 % FFP2 ≤ 6 % FFP3 ≤ 1 %	Filtering half masks fulfill the requirements of the standard EN EN 149:2001 + A1:2009 given in 7.9.2 in range of the FFP1, FFP2 classes.	
(A.R.)	-	3,4			
(A.R.)	-	3,3			
(S.W.)	-	3,5			
(S.W.)	-	3,5			
(S.W.)	-	3,4			
(M.S. T.C.)	-	4,7			
(M.S. T.C.)	-	4,1			
(M.S. T.C.)	-	4,5			
Conditioning : (M.S.) Mechanical Strength (T.C.) Temperature Conditioning (A.R.) As Received, original (S.W.) Simulated wearing treatment					
Article 7.10	Compatibility with skin: In Practical Performance report, the likelihood of mask materials in contact with the skin causing irritation or other adverse effect on health was not reported.				
Flammability :					
Condition	No. of Sample	Visual inspection	Requirements in accordance with EN 149:2001 + A1:2009	Result	
(A.R.)	-	Burn for 1s	Filtering half mask shall not burn or not continue to burn for more than 5 s after removal from the flame	Passed Filtering half masks fulfill requirements of the standard	
(A.R.)	-	Burn for 1s			
(T.C.)	-	Burn for 1s			
(T.C.)	-	Burn for 2s			
Conditioning : (A.R.) As Received, original (T.C.) Temperature Conditioning					
Carbon dioxide content of the inhalation air:					
Condition	No. of Sample	CO <sub>2</sub> content of the inhalation air [%] by volume	An average CO <sub>2</sub> content of the inhalation air	Requirements in accordance with EN 149:2001 + A1:2009	Result
(A.R.)	-	0,2	0,3 [%]	CO <sub>2</sub> content of the inhalation air shall not exceed an average of 1,0% by volume	Passed Filtering half masks fulfil requirements of the standard
(A.R.)	-	0,3			
(A.R.)	-	0,3			
Conditioning : (A.R.) As Received, original					
Article 7.13	Head harness: In Practical Performance and TIL test reports no adverse effects have been reported for donning and remove of the mask also the results of these tests indicates that the ear loops / head harness are capable of holding the mask firmly enough.				
Article 7.14	Field of vision: In Practical Performance report, no adverse effects were reported for the field of vision availability when the mask is worn.				
Article 7.15	Exhalation Valve(s): The model under inspection have no valves.				
Article 7.16	Breathing Resistance: Inhalation The overall evaluation in the figures gathered for 9 different samples 3 as received, 3 with temperature conditioning and 3 simulated wearing treatment conditioned complies with the limits given in the standard for FFP1, FFP2 and FFP3 classes. This is valid for inhalation results for 30 L/min, 95 L/min and exhalation at 160 L/min.  Passed.				

Article 7.17	<b>Clogging:</b> This test is not applied to Particle Filtering Half Mask which is not reusable. (For single shift use devices, the clogging test is optional test. For re-usable devices test is mandatory.)
Article 7.18	<b>Demountable Parts:</b> There are no demountable parts on the product.
Article 8	<b>Testing:</b> All tests conducted according to Clause 8 of this standard is available in the test report and are evaluated in this report for qualification and classification of the mask.
Article 9	<b>Marking – Packaging:</b> Necessary markings are available on the product package (box). The manufacturer and its trademark is clearly visible. The type of the mask and the classification including the status of re-usability, the reference to EN 149:2001+A1:2009 standard, the end date of shelf life, using and storage instructions and pictograms and CE mark are available on the product package. The above evaluation is based on the technical document for packaging and marking, for box design. Verified on the Annex 9.1 of the technical file.  The technical documentation for mask design (drawing) also evaluated for marking requirements, drawing YY0525. Even the mask template (drawing) not indicates the necessary markings, the image of the mask in the technical file carries information about the manufacturer / trademark (CRDLIGHT) of the manufacturer, Type of mask, the reference to EN 149+A1:2009 standard and classification including the re-usability of the mask. The manufacturer also printed CE mark with our Notified Body number. The mask do not have sub-assemblies. Even the tested sample by the laboratory do not carry necessary marking information as stated in the technical documentation, the manufacturer shall follow marking instructions for serial production. Model YY0525 drawing exists in the technical file of the manufacturer, Annex 6 of technical file.
Article 10	<b>Information to be supplied by the manufacturer:</b> In each of the smallest commercially available packaging of the product, implementation (installation instructions) pre-use controls, warning and usage limitations, storage and meanings of symbols / pictograms are defined. User instruction document in the technical file found to be appropriate, Annex 8. The manufacturer shall include this documented user information text in every smallest commercially available package.

PREPARED BY	APPROVED BY
Osman CAMCI PPE Expert	Suat KAÇMAZ Director







TL-861



Company: Trust Right Testing and Certification Service (Zhongshan) Ltd.  
 Address: No.601, Block 8, Hongji E Valley Industry Center, Nantou Town, Zhongshan City, P.R. China  
 Tel: 0760-86117019

## Test Report

### -Filtering half masks to protect against particles

PERFORMED IN ACCORDANCE WITH:

EN 149:2001+A1:2009 Respiratory protective devices - Filtering half masks to protect against particles - Requirements, testing, marking

**Test Report No.: R2020062**

Tested by (name + function + signature)....:	Alex He	Test Engineer	
Approved by (name + function + signature)....:	Dyne Wang	Laboratory Manager	
Date of issue :		Jun 15 <sup>th</sup> , 2020	

**Project No.:** P2020085

**Testing Laboratory** .....: **Trust Right Testing and Certification Service (Zhongshan) Ltd.**

Address .....: No.28, Shangjian Road, Nantou Town, Zhongshan Guangdong

**Testing Location** .....: **Trust Right Testing and Certification Service (Zhongshan) Ltd.**

Address .....: No.28, Shangjian Road, Nantou Town, Zhongshan Guangdong

**Applicant's name** .....: **UNIVERSAL CERTIFICATION and SURVEILLANCE SERVICES Trade Co.**

Address .....

**Manufacturer's name** .....: **JIANGMEN YANYANG TRADING CO.,LTD**

Address .....: NO.1, 4THFLOOR, BUILDING2, NO.18XINYIROAD, JIANGHAI DISTRICT, JIANGMENCITY, GUANGDONGPROVINCE, CHINA

**Factory's name** .....: **Same as manufacturer**

Address .....: Same as manufacturer

**Test item description:** **Filtering half mask**

Trade Mark .....: N/A

Model/Type reference.....: YY0525

Grade.....: FFP2

Country of destination (code) .....: N/A

**Sample**

Samples received on .....: Jun 5<sup>th</sup>, 2020

Reference samples.....: S20200YY

Samples tested on.....: Jun 5<sup>th</sup>, 2020 – Jun 15<sup>th</sup>, 2020

**Result** ..... : The test items **PASSED/FAILED** partially the test specification(s).  
 For detailed testing of items, please refer to the report and testing data.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Trust Right Testing and Certification Service (Zhongshan) Ltd. is acknowledged as copyright owner and source of the material. Trust Right Testing and Certification Service (Zhongshan) Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context. The results referred in this report are only relevant to the samples tested and described in this report.



TL-861



Company: Trust Right Testing and Certification Service (Zhongshan) Ltd.  
Address: No.601, Block 8, Hongji E Valley Industry Center, Nantou Town, Zhongshan City, P.R. China  
Tel: 0760-86117019

## Test Report

RELEASE CONTROL RECORD		
TEST REPORT NUMBER	REASON OF CHANGE	DATE OF ISSUE



TL-861



Company: Trust Right Testing and Certification Service (Zhongshan) Ltd.  
Address: No.601, Block 8, Hongji E Valley Industry Center, Nantou Town, Zhongshan City, P.R. China  
Tel: 0760-86117019

## Test Report

### GENERAL DESCRIPTION OF THE APPLIANCE

#### 1, Description of the appliances

Product description	Filtering half mask
Product name	Filtering half mask
Model	YY0525
Classification	FFP2




TL-861



Company: Trust Right Testing and Certification Service (Zhongshan) Ltd.  
Address: No.601, Block 8, Hongji E Valley Industry Center, Nantou Town, Zhongshan City, P.R. China  
Tel: 0760-86117019

# Test Report

## PICTURES

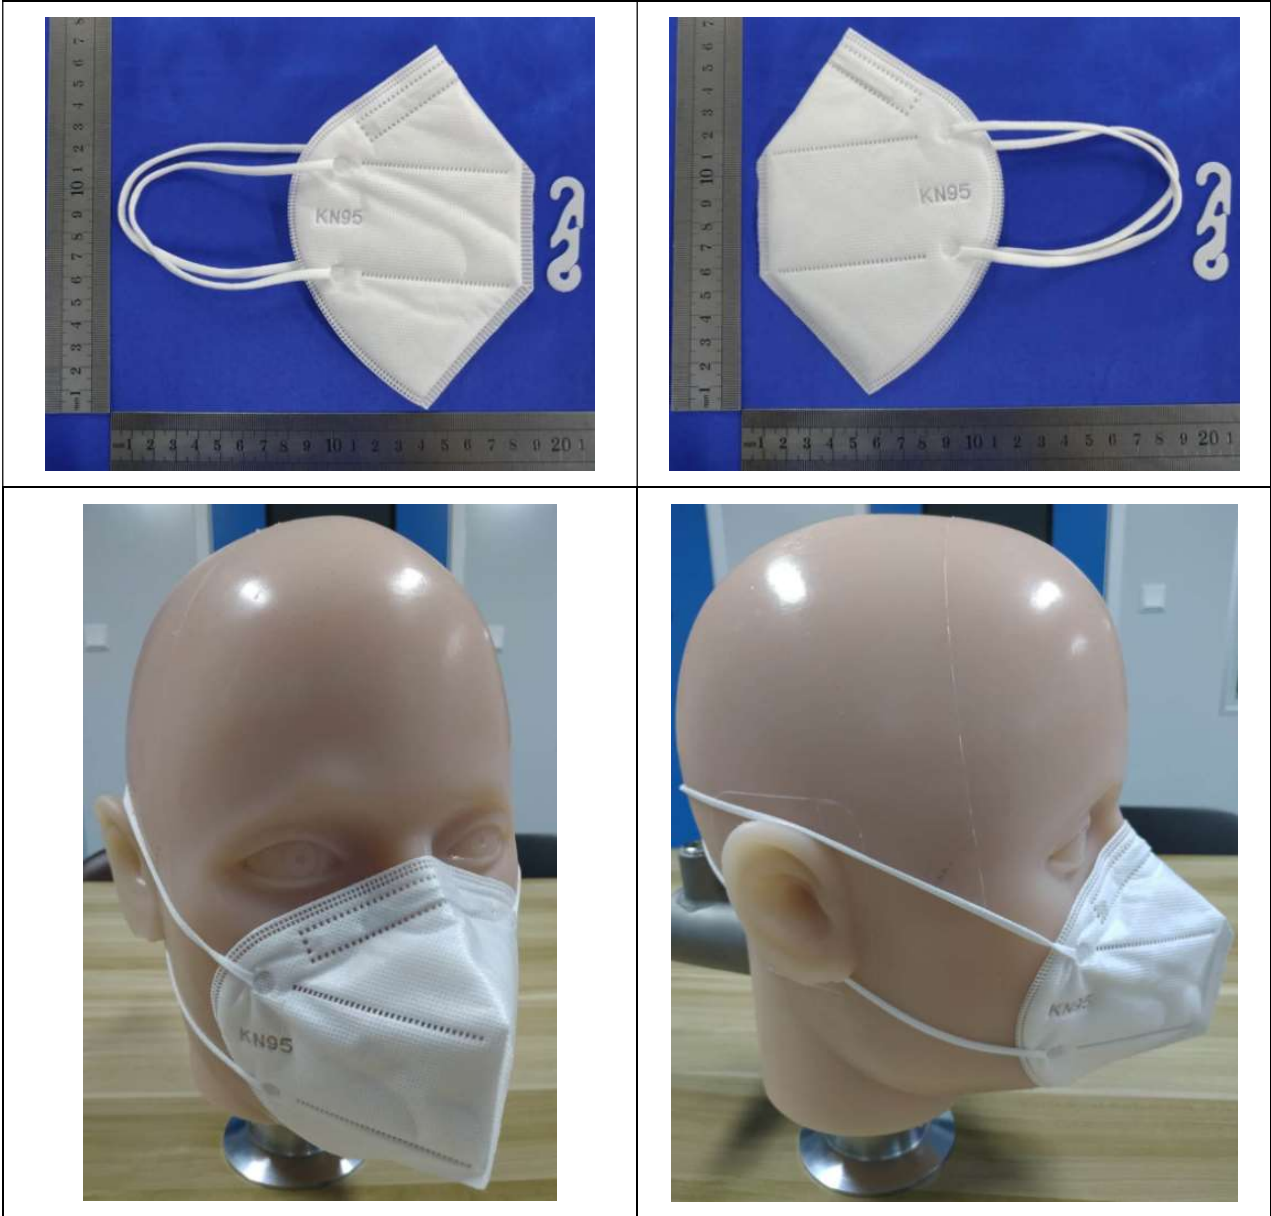

### PRINCIPALS COMPONENTS

COMPONENT	MANUFACTURER	MODEL	Certificate/report



TL-861



Company: Trust Right Testing and Certification Service (Zhongshan) Ltd.  
 Address: No.601, Block 8, Hongji E Valley Industry Center, Nantou Town, Zhongshan City, P.R. China  
 Tel: 0760-86117019

## Test Report

### Evaluation according to the test specification (standard)

**Abbreviations of the verdict:**

<b>P(ass)</b>	<b>=</b>	<b>passed</b>
<b>F(ail)</b>	<b>=</b>	<b>failed</b>
<b>N/A</b>	<b>=</b>	<b>not applicable</b>
<b>N/T</b>	<b>=</b>	<b>not tested</b>

EN 149:2001+A1:2009 Respiratory protective devices - Filtering half masks to protect against particles - Requirements, testing, marking

Clause	Requirements	Result/Comment	Verdict
1	Scope		
2	Normative references		
3	Terms and definitions		
4	Description		
5	Classification		
	Particle filtering half masks are classified according to their filtering efficiency and their maximum total inward leakage. There are three classes of devices:		P
	- FFP1		N/A
	- FFP2	Designation is Grade FFP2.	P
	- FFP3		N/A
6	Designation		P
	Particle filtering half masks meeting the requirements of this European Standard shall be designated in the following manner:		
7	Requirements		P
7.1	General		P
	All test all test samples shall meet the requirements.		P
7.2	Nominal values and tolerances		P
	Except for temperature limits, values which are not stated as maxima or minima shall be subject to a tolerance of $\pm 5\%$ . Unless otherwise specified, the ambient temperature for testing shall be $(16-32)^{\circ} \text{C}$ , and the temperature limits shall be subject to an accuracy of $\pm 1^{\circ} \text{C}$		P
7.3	Visual inspection		P
	The visual inspection shall also include the marking and the information supplied by the manufacturer.	In accordance with requirement	P



TL-861



Company: Trust Right Testing and Certification Service (Zhongshan) Ltd.  
 Address: No.601, Block 8, Hongji E Valley Industry Center, Nantou Town, Zhongshan City, P.R. China  
 Tel: 0760-86117019

## Test Report

7.4	Packaging		P
	Particle filtering half masks shall be offered for sale packaged in such a way that they are protected against mechanical damage and contamination before use.	In accordance with requirement	P
7.5	Material		P
	Materials used shall be suitable to withstand handling and wear over the period for which the particle filtering half mask is designed to be used. After undergoing the conditioning described in 8.3.1 none of the particle filtering half masks shall have suffered mechanical failure of the facepiece or straps. Three particle filtering half masks shall be tested. When conditioned in accordance with 8.3.1 and 8.3.2 the particle filtering half mask shall not collapse. Any material from the filter media released by the air flow through the filter shall not constitute a hazard or nuisance for the wearer.	No mechanical failure after undergoing the conditioning described in 8.3.1. No collapse when conditioned in accordance with 8.3.1 and 8.3.2.	P
7.6	Cleaning and disinfecting	Single shift use only.	N/A
7.7	Practical performance		P
	The particle filtering half mask shall undergo practical performance tests under realistic conditions. These general tests serve the purpose of checking the equipment for imperfections that cannot be determined by the tests described elsewhere in this standard. Where practical performance tests show the apparatus has imperfections related to wearer's acceptance, the test house shall provide full details of those parts of the practical performance tests which revealed these imperfections.	No imperfections.	P
7.8	Finish of parts		P
	Parts of the devices likely come into contact with the wearer shall have no sharp edges or burrs.	No sharp edges or burrs.	P



TL-861



Company: Trust Right Testing and Certification Service (Zhongshan) Ltd.  
 Address: No.601, Block 8, Hongji E Valley Industry Center, Nantou Town, Zhongshan City, P.R. China  
 Tel: 0760-86117019

## Test Report

7.9	Leakage		P																				
7.9.1	Total inward leakage		P																				
	<p>The laboratory tests shall indicate that the particle filtering half mask can be used by the wearer to protect with high probability against the potential hazard to be expected.</p> <p>The total inward leakage consists of three components: face seal leakage, exhalation valve leakage (if exhalation valve fitted) and filter penetration.</p> <p>For particle filtering half masks fitted in accordance with the manufacturer's information, at least 46 out of the 50 individual exercise results (i.e. 10 subjects x 5 exercises) for total inward leakage shall be not greater than</p> <p style="text-align: center;">25 % for FFP1 11 % for FFP2 5 % for FFP3</p> <p>and, in addition, at least 8 out of the 10 individual wearer arithmetic means for the total inward leakage shall be not greater than</p> <p style="text-align: center;">22 % for FFP1 8 % for FFP2 2 % for FFP3</p> <p>Testing shall be done in accordance with 8.5.</p>	<p>Meeting requirement of 11 % for FFP2</p> <p>Meeting requirement of 8 % for FFP2</p> <p>Detail refer to table 1</p>	P																				
7.9.2	Penetration of filter material		P																				
	<p>The penetration of the filter of the particle filtering half mask shall meet the requirements of Table 1.</p> <p style="text-align: center;">Table 1 — Penetration of filter material</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2">Classification</th> <th colspan="2">Maximum penetration of test aerosol (%)</th> </tr> <tr> <th>Sodium chloride test 95 l/min</th> <th>Paraffin oil test 95 l/min</th> </tr> <tr> <td></td> <td style="text-align: center;">%</td> <td style="text-align: center;">%</td> </tr> <tr> <td></td> <td style="text-align: center;">max.</td> <td style="text-align: center;">max.</td> </tr> </thead> <tbody> <tr> <td>FFP1</td> <td style="text-align: center;">20</td> <td style="text-align: center;">20</td> </tr> <tr> <td>FFP2</td> <td style="text-align: center;">6</td> <td style="text-align: center;">6</td> </tr> <tr> <td>FFP3</td> <td style="text-align: center;">1</td> <td style="text-align: center;">1</td> </tr> </tbody> </table> <p>A total of 9 samples of particle filtering half masks shall be tested for each aerosol.</p>	Classification	Maximum penetration of test aerosol (%)		Sodium chloride test 95 l/min	Paraffin oil test 95 l/min		%	%		max.	max.	FFP1	20	20	FFP2	6	6	FFP3	1	1	<p>Detail refer to table 2</p>	P
Classification	Maximum penetration of test aerosol (%)																						
	Sodium chloride test 95 l/min	Paraffin oil test 95 l/min																					
	%	%																					
	max.	max.																					
FFP1	20	20																					
FFP2	6	6																					
FFP3	1	1																					
7.10	Compatibility with skin		P																				
	<p>Materials that may come into contact with the wearer's skin shall not be known to be likely to cause irritation or any other adverse effect to health.</p>	<p>No irritation or any other adverse effect to health.</p>	P																				
7.11	Flammability		P																				
	<p>The material used shall not present a danger for the wearer and shall not be of highly flammable nature.</p>	<p>Detail refer to table 3</p>	P																				



TL-861



Company: Trust Right Testing and Certification Service (Zhongshan) Ltd.  
 Address: No.601, Block 8, Hongji E Valley Industry Center, Nantou Town, Zhongshan City, P.R. China  
 Tel: 0760-86117019

## Test Report

7.12	Carbon dioxide content of the inhalation air		P																						
	The carbon dioxide content of the inhalation air (dead space) shall not exceed an average of 1,0% (by volume).	Detail refer to table 4	P																						
7.13	Head harness		P																						
	Head harness shall be designed can be donned and removed easily and adjustable or self-adjusting and sufficiently robust to hold the particle.		P																						
7.14	Field of vision		P																						
	Field of vision is acceptable in practical performance tests.		P																						
7.15	Exhalation valve(s)																								
	<p>A particle filtering half mask may have one or more exhalation valve(s) and shall function correctly in all orientations.</p> <p>If an exhalation valve is provided it shall be protected against or be resistant to dirt and mechanical damage and may be shrouded or may include any other device that may be necessary for the particle filtering half mask to comply with 7.9.</p> <p>Exhalation valve(s), if fitted, shall continue to operate correctly after a continuous exhalation flow of 300 l/min over a period of 30 s.</p> <p>When the exhalation valve housing is attached to the faceblank, it shall withstand axially a tensile force of 10 N applied for 10 s.</p>	No exhalation valve	N/A																						
7.16	Breathing resistance		P																						
	<p>The breathing resistances apply to valved and valveless particle filtering half mask and shall meet the requirements of table 2.</p> <p style="text-align: center;"><b>Table 2 — Breathing resistance</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="3">Classification</th> <th colspan="3">Maximum permitted resistance (mbar)</th> </tr> <tr> <th colspan="2">inhalation</th> <th>exhalation</th> </tr> <tr> <th>30 l/min</th> <th>95 l/min</th> <th>160 l/min</th> </tr> </thead> <tbody> <tr> <td>FFP1</td> <td>0,6</td> <td>2,1</td> <td>3,0</td> </tr> <tr> <td>FFP2</td> <td>0,7</td> <td>2,4</td> <td>3,0</td> </tr> <tr> <td>FFP3</td> <td>1,0</td> <td>3,0</td> <td>3,0</td> </tr> </tbody> </table>	Classification	Maximum permitted resistance (mbar)			inhalation		exhalation	30 l/min	95 l/min	160 l/min	FFP1	0,6	2,1	3,0	FFP2	0,7	2,4	3,0	FFP3	1,0	3,0	3,0	Detail refer to table 5	P
Classification	Maximum permitted resistance (mbar)																								
	inhalation		exhalation																						
	30 l/min	95 l/min	160 l/min																						
FFP1	0,6	2,1	3,0																						
FFP2	0,7	2,4	3,0																						
FFP3	1,0	3,0	3,0																						
7.17	Clogging		N/A																						
7.18	Demount-able parts	Earloops with adjustable device	P																						
8	Testing																								
9	Marking																								





TL-861



Company: Trust Right Testing and Certification Service (Zhongshan) Ltd.  
 Address: No.601, Block 8, Hongji E Valley Industry Center, Nantou Town, Zhongshan City, P.R. China  
 Tel: 0760-86117019

## Test Report

9.1	Packaging		
	The following information shall be clearly and durably marked on the smallest commercially available packaging or legible through it if the packaging is transparent.		
9.1.1	The name, trademark or other means of identification of the manufacturer or supplier.	Not provided by the applicant;	N/T
9.1.2	Type-identifying marking.	Not provided by the applicant;	N/T
9.1.3	Classification: FFP1, FFP2, FFP3. "NR" if the particle filtering half mask is limited to single shift use only. Example: FFP3 NR, or "R" if the particle filtering half mask is re-usable. Example: FFP2 R D	Not provided by the applicant;	N/T
9.1.4	The number and year of publication of this European Standard.	Not provided by the applicant;	N/T
9.1.5	At least the year of end of shelf life.	Not provided by the applicant;	N/T
9.1.6	The sentence 'see information supplied by the manufacturer', at least in the official language(s) of the country of destination, or by using the pictogram as shown in Figure 12b.	Not provided by the applicant;	N/T
9.1.7	The manufacturer's recommended conditions of storage (at least the temperature and humidity) or equivalent pictogram, as shown in Figures 12c and 12d.	Not provided by the applicant;	N/T
9.1.8	The packaging of those particle filtering half masks passing the dolomite clogging test shall be additionally marked with the letter "D".	Not provided by the applicant;	N/A
9.2	Particle filtering half mask		
	Particle filtering half masks complying with this European Standard shall be clearly and durably marked with the following:		
9.2.1	The name, trademark or other means of identification of the manufacturer or supplier.	Not provided by the applicant;	N/T
9.2.2	Type-identifying marking.	Not provided by the applicant;	N/T
9.2.3	The number and year of publication of this European Standard.	Not provided by the applicant;	N/T
9.2.4	The symbols FFP1, FFP2 or FFP3 according to class.	Not provided by the applicant;	N/T
9.2.5	If appropriate the letter D (dolomite) in accordance with clogging performance. This letter shall follow the class designation (see 9.2.4).	Not provided by the applicant;	N/A
9.2.6	Sub-assemblies and components with considerable bearing on safety shall be marked so that they can be identified.	Not provided by the applicant;	N/A
10	Information to be supplied by the manufacturer		



TL-861



Company: Trust Right Testing and Certification Service (Zhongshan) Ltd.  
 Address: No.601, Block 8, Hongji E Valley Industry Center, Nantou Town, Zhongshan City, P.R. China  
 Tel: 0760-86117019

## Test Report

10.1	Information supplied by the manufacturer shall accompany every smallest commercial available package	Not provided by the applicant;	N/T
10.2	Information supplied by the manufacturer shall be at least in the official language(s) of the country of destination	Not provided by the applicant;	N/T
10.3	The information supplied by the manufacturer shall contain all information necessary for trained and qualified persons on	Not provided by the applicant;	N/T
	<ul style="list-style-type: none"> <li>- application/limitations</li> <li>- the meaning of any colour coding</li> <li>- checks prior to use</li> <li>- donning, fitting</li> <li>- use</li> <li>- maintenance (e.g. cleaning, disinfecting), if applicable</li> <li>- storage</li> <li>- the meaning of any symbols/pictograms used</li> </ul>	Not provided by the applicant;	N/T
10.4	The information shall be clear and comprehensible. If helpful, illustrations, part numbers, marking shall be added.	Not provided by the applicant;	N/T
10.5	<p>Warning shall be given against problems likely to be encountered, for example:</p> <ul style="list-style-type: none"> <li>- fit of particle filtering half mask (check prior to use)</li> <li>- it is unlikely that the requirements for leakage will be achieved if facial hair passes under the face seal</li> <li>- air quality (contaminants, oxygen deficiency)</li> <li>- use of equipment in explosive atmosphere</li> </ul>	Not provided by the applicant;	N/T
10.6	The information shall provide recommendations as to when the particle filtering half mask shall be discarded.	Not provided by the applicant;	N/T
10.7	For devices marked "NR", a warning shall be given that the particle filtering half mask shall not be used for more than one shift.	Not provided by the applicant;	N/T



TL-861



Company: Trust Right Testing and Certification Service (Zhongshan) Ltd.  
 Address: No.601, Block 8, Hongji E Valley Industry Center, Nantou Town, Zhongshan City, P.R. China  
 Tel: 0760-86117019

## Test Report

### TEST DATA

**Table 1 – 7.9.1 Total inward leakage**

Model	YY0525					
Classification	FFP2					
Exercises	E1 (%)	E2 (%)	E3 (%)	E4 (%)	E5 (%)	TIL (%)
A.R.	8.7	8.7	8.6	6.7	8.9	8.3
	7.0	7.5	6.8	8.6	8.2	7.6
	7.5	6.8	7.3	6.9	7.1	7.1
	8.0	7.8	7.6	7.0	8.0	7.7
	8.9	7.6	7.6	7.4	7.5	7.8
T.C.	8.5	7.3	7.2	7.5	7.9	7.7
	7.5	8.1	6.8	7.7	6.9	7.4
	8.6	6.8	7.0	7.6	8.1	7.6
	7.1	8.4	6.7	7.4	7.8	7.5
	8.0	7.8	7.7	8.1	7.0	7.7
Requirement	For particle filtering half masks fitted in accordance with the manufacturer's information, at least 46 out of the 50 individual exercise results (i.e. 10 subjects x 5 exercises) for total inward leakage shall be not greater than  <b>25 % for FFP1</b> <b>11 % for FFP2</b> <b>5 % for FFP3</b>			at least 8 out of the 10 individual wearer arithmetic means for the total inward leakage shall be not greater than  <b>22 % for FFP1</b> <b>8 % for FFP2</b> <b>2 % for FFP3</b>		
Result	P			P		

Testing Subject Family name of volunteer	Face Length (mm)	Face Width (mm)	Face Depth (mm)	Mouth Width (mm)
Luo	128	149	116	54
Yuan	107	125	110	52
Liang	119	147	115	58
Chen	124	135	110	49
Yang	115	127	124	53
Chen	115	139	119	55
Zeng	109	123	115	52
Lai	118	135	117	55
Jiang	119	126	116	59
Feng	120	145	119	54



TL-861



Company: Trust Right Testing and Certification Service (Zhongshan) Ltd.  
 Address: No.601, Block 8, Hongji E Valley Industry Center, Nantou Town, Zhongshan City, P.R. China  
 Tel: 0760-86117019

## Test Report

**Table 2 – 7.9.2 Penetration of filter material**

Model	YY0525					
Classification	FFP2					
Test flow rate (l/min)	95					
Test aerosol	Sodium chloride			Paraffin oil		
Sample performed	A.R.	S.W.	M.S.+T.C.	A.R.	S.W.	M.S.+T.C.
Measured Penetration (%)	1.4	1.3	1.6	3.0	3.5	4.7
	1.3	1.3	1.6	3.4	3.5	4.1
	1.2	1.4	1.5	3.3	3.4	4.5
Required (%)	FFP2: ≤ 6			FFP2: ≤ 6		
Result	P	P	P	P	P	P

**Table 3 – 7.11 Flammability**

Condition	Result	Assessment
As received	Burn for 1s	P
	Burn for 1s	
Temperature conditioned	Burn for 1s	
	Burn for 2s	
Required: when tested, the particle filtering half mask shall not burn or not to continue to burn for more than 5 s after removal from the flame.		



TL-861

Company: Trust Right Testing and Certification Service (Zhongshan) Ltd.  
 Address: No.601, Block 8, Hongji E Valley Industry Center, Nantou Town, Zhongshan City, P.R. China  
 Tel: 0760-86117019

## Test Report

**Table 4 – 7.12 Carbon dioxide content of the inhalation air**

Model	YY0525		
Samples	Sample 1	Sample 2	Sample 3
Measured CO <sub>2</sub> (%)	0.2	0.3	0.3
Average CO <sub>2</sub> (%)	0.3		
Required	The carbon dioxide content of the inhalation air (dead space) shall not exceed an average of 1,0 % (by volume)		
Result	P		

**Table 5 – 7.16 Breathing resistance**

		YY0525															
A.R	Flow rate	1					2					3					
		A	B	C	D	E	A	B	C	D	E	A	B	C	D	E	
	Inhalation	30 l/min	0.3	0.4	0.3	0.3	0.3	0.2	0.4	0.2	0.2	0.3	0.3	0.2	0.2	0.2	0.3
		95 l/min	1.6	1.5	1.7	1.6	1.6	1.5	1.5	1.6	1.5	1.6	1.6	1.7	1.6	1.6	1.6
Exhalation	160 l/min	2.2	2.2	2.1	2.1	2.1	2.2	2.2	2.1	2.1	2.2	2.1	2.1	2.1	2.1	2.1	
S.W.	Flow rate	4					5					6					
		A	B	C	D	E	A	B	C	D	E	A	B	C	D	E	
	Inhalation	30 l/min	0.3	0.4	0.2	0.2	0.3	0.2	0.2	0.3	0.3	0.3	0.2	0.2	0.2	0.2	0.2
		95 l/min	1.5	1.7	1.5	1.6	1.6	1.5	1.5	1.6	1.6	1.5	1.6	1.6	1.6	1.6	1.6
Exhalation	160 l/min	2.1	2.0	2.0	2.1	2.0	2.0	2.0	2.0	2.0	2.2	2.2	2.1	2.0	2.1	2.1	
T.C.	Flow rate	7					8					9					
		A	B	C	D	E	A	B	C	D	E	A	B	C	D	E	
	Inhalation	30 l/min	0.3	0.3	0.3	0.4	0.2	0.2	0.3	0.2	0.2	0.3	0.2	0.2	0.3	0.2	0.2
		95 l/min	1.6	1.6	1.7	1.7	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.7	1.5	1.7
Exhalation	160 l/min	2.0	2.1	2.2	2.1	2.1	2.1	2.1	2.1	2.2	2.2	2.1	2.0	2.1	2.1	2.2	
Result	P																
A: facing directly ahead; B: facing vertically upwards; C: facing vertically downwards; D: lying on the left side; E: lying on the right side;																	



TL-861



Company: Trust Right Testing and Certification Service (Zhongshan) Ltd.  
 Address: No.601, Block 8, Hongji E Valley Industry Center, Nantou Town, Zhongshan City, P.R. China  
 Tel: 0760-86117019

## Test Report

### Equipement

#### List of test equipment used:

Serial No	Description	Model/Trade Mark	Next Calibration Date
ZSTE-001	Ambient Barometer	DYM3	24 <sup>th</sup> Jun. 2021
ZSTE-002	Ambient temperature and Humidity recorder	Cos-03	9 <sup>th</sup> Apr. 2021
ZSTE-009	Digital Pressure Gauge	BG80-B-21F-0N21	2 <sup>nd</sup> Apr. 2021
ZSTE-017	Two Row Stopwatch	PC2810	6 <sup>th</sup> Apr. 2021
ZSTE-030	Digital Data Collector	34970A	2 <sup>nd</sup> Apr. 2021
ZSTE-030.01	20-Channel Armature Multiplexer	34901A	2 <sup>nd</sup> Apr. 2021
ZSTE-070	Pull-Push Force tester	NK-300	3 <sup>rd</sup> Apr. 2021
ZSTE-082	Digital Vernier Caliper	0-200_0.01mm	11 <sup>th</sup> Apr. 2020
ZSTE-083	Wind Speed Meter	Testo416	19 <sup>th</sup> Jun. 2020
ZSTE-108	Electronic Scale	JJ224BC	29 <sup>th</sup> May. 2020
ZSTE-115	Graduated Cylinder	100ml	28 <sup>th</sup> May. 2024
ZSTE-122	Beaker	500ml	28 <sup>th</sup> May. 2024
ZSTE-140	Weight	1kg	19 <sup>th</sup> Jun. 2022
ZSTE-200	Aerosol generator	TDA-5B	14 <sup>th</sup> May. 2021
ZSTE-215	Air quality analyzer	M2000	24 <sup>th</sup> June. 2021
ZSTE-216	Air quality analyzer	M2000	24 <sup>th</sup> June. 2021
TSGK-T-005	Penetration of Filter Material Tester	LSK	9 <sup>th</sup> Mar. 2021
TSGK-T-056	Breath Resistance Tester	RL 2051C	5 <sup>th</sup> May. 2021
TSGK-T-002	Flammability	KP415	9 <sup>th</sup> Mar. 2021
TSGK-T-045	Leakage with Enclosure	RL 2001	5 <sup>th</sup> May. 2021

END TEST REPORT

## CERTIFICATE OF CONFORMANCE

**Certificate No: 2163-PPE-834/01**

Respiratory protective devices, filtering half masks to protect against particles manufactured by

**JIANGMEN YANYANG TRADING CO., LTD.**

NO.1,4th Floor, Building 2, NO.18 Xinyi Road, Jianghai District,  
Jiangmen City, Guangdong Province, China

Continues to fulfil the requirements of

**EN 149:2001 + A1:2009 Respiratory Protective Devices -  
Filtering Half Masks to Protect Against Particles -  
Requirements, Testing, Marking**

Based on the evaluation of test reports and internal quality control audit reports according to EN 149+A1:2009 and Personal Protective Equipment Regulation (EU) 2016/425 Annex VII (Module C2). This certificate implies that the manufactured products show below are in conformance with the approved EU Type Examination model and meets the requirements of the regulation.

#### Product Definition

Model	Class	EU Type Examination Certificate		
		Serial No	Date	Issuing NB No
CRDLIGHT / YY0525	FFP2 NR	2163-PPE-834	25.06.2020	2163

Here by the manufacturer is allowed to use notified body number (2163) and can fix CE mark, as shown below, on the Category III product models given above, with;

- Issuing an appropriate EU Declaration of Conformity according to **Personal Protective Equipment Regulation (EU) 2016/425 Annex 9.**
- Taking all measures necessary so that the manufacturing process and its monitoring ensure the homogeneity of production and conformity of the manufactured PPE with the type described in the EU type examination certificate.

This certificate is issued on **19/08/2020** and will be valid for one year, until **18/08/2021** if the manufacturer makes no major change in the product designs and manufacturing processes affecting the product performance on the essential health and safety requirement.

**CE**  
2163



Suat KAÇMAZ  
UNIVERSAL CERTIFICATION  
Director



Verify the validity with the QR code

**Test Report** SL52025257539101TX-1 **Date:** June 29, 2020 **Page 1 of 9**  
JIANGMEN YANYANG TRADING CO.,LTD  
NO.1, 4TH FLOOR, BUILDING 2, NO.18 XINYI ROAD, JIANGHAI DISTRICT, JIANGMEN CITY

**THIS REPORT CANCELS AND SUPERSEDES THE TEST REPORT NO. SL52025257539101TX DATE:2020-06-18 ISSUED BY SGS (Shanghai) UPDATED SAMPLE INFORMATION**

The following sample(s) was/were submitted and identified on behalf of the client as:

Sample Description : (A)Filtering half mask  
Style No. : YY0525  
Composition : (A)Non-woven fabric, melt-blown fabric, hot air cotton  
Sample Color : (A)White  
Manufacturer : JIANGMEN YANYANG TRADING CO.,LTD  
Country of Destination : EUR

Test Performed : Selected test(s) as requested by applicant

Sample Receiving Date : May 15, 2020  
Testing Period : May 15, 2020 - Jun 18, 2020  
Test Result(s) : Unless otherwise stated the results shown in this test report refer only to the sample(s) tested, for further details, please refer to the following page(s).

**Conclusion:**

Sample No.	Recommendation Level
(A)	FFP2 NR

Signed for and on behalf of  
SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd Testing Center

Sara Guo (Account Executive)

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8387 1443, or email: [CN.Recheck@sgs.com](mailto:CN.Recheck@sgs.com)



**Test Result**
**Personal Protective Equipment - Respiratory Protective Devices- Filtering Half Masks to Protect against Particles- Requirements, Testing, Marking**

EN 149:2001+A1:2009

**Clause 7.4 Packaging**

(EN 149:2001+A1:2009 Clause 8.2)

Test Requirement	Results	Comment
Particle filtering half masks shall be offered for sale packaged in such a way that they are protected against mechanical damage and contamination before use.	Comply	Pass

**Clause 7.5 Material**

(EN 149:2001+A1:2009, Clause 8.2 &amp; 8.3.1 &amp; 8.3.2)

Test Requirement	Results	Comment
Materials used shall be suitable to withstand handling and wear over the period for which the particle filtering half mask is designed to be used.	Comply	Pass
After undergoing the conditioning described in 8.3.1 none of the particle filtering half masks shall have suffered mechanical failure of the facepiece or straps.	Comply	
When conditioned in accordance with 8.3.1 and 8.3.2 the particle filtering half mask shall not collapse.	Comply	
Any material from the filter media released by the air flow through the filter shall not constitute a hazard or nuisance for the wearer.	Comply	

**Clause 7.6 Cleaning and Disinfecting**

(EN 149:2001+A1:2009, Clause 8.4 &amp; 8.5 &amp; 8.11)

Test Requirement	Results	Comment
If the particle filtering half mask is designed to be re-usable, the materials used shall withstand the cleaning and disinfecting agents and procedures to be specified by the manufacturer. With reference to 7.9.2, after cleaning and disinfecting the re-usable particle filtering half mask shall satisfy the penetration requirement of the relevant class.	Not applicable (Not designed to be re-usable)	N.A.

**Clause 7.7 Practical Performance**

(EN 149:2001+A1:2009, Clause 8.4)

Test Requirement	Results	Comment
The particle filtering half mask shall undergo practical performance tests under realistic conditions. These general tests serve the purpose of checking the equipment for imperfections that cannot be determined by the tests described elsewhere in this standard.	No imperfections	Pass

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained herein reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 83071443, or email: CN\_Qoccheck@sgs.com

3<sup>rd</sup> Building No. 868, Yehuan Road, Xuhui District Shanghai, China 200233 1 (86-21) 61402666 1 (86-21) 64958763 www.sgs.com.cn

中国·上海·徐汇区宜山路868号3号楼 邮编: 200233 1 (86-21) 61402666 1 (86-21) 64958763 e-sgs.china@sgs.com



**Clause 7.8 Finish of Parts**

(EN 149:2001+A1:2009, Clause 8.2)

Test Requirement	Results	Comment
Parts of the device likely to come into contact with the wearer shall have no sharp edges or burrs.	No sharp edges or burrs	Pass

**Clause 7.9.1 Total Inward Leakage**

(EN 149:2001+A1:2009, Clause 8.5)

Test Requirement	Results	Comment
The total inward leakage consists of three components: face seal leakage, exhalation valve leakage(if exhalation valve fitted) and filter penetration. For particle filtering half masks fitted in accordance with the manufacturer's information, at least 46 out of the 50 individual exercise results (i.e. 10 subjects x 5 exercises) for total inward leakage shall be not greater than: 25% for FFP1, 11% for FFP2, 5% for FFP3  and, in addition, at least 8 out of the 10 individual wearer arithmetic means for the total inward leakage shall be not greater than: 22% for FFP1, 8% for FFP2, 2% for FFP3	Detail refer to Appendix 1	Meet FFP1 Meet FFP2

**Appendix 1: Summarization of Test Data**
**Inward Leakage Test Data**

Subject	Sample No.	Condition	Walk(%)	Head Side/side(%)	Head up/down(%)	Talk(%)	Walk(%)	Mean(%)
Zhou	1	A.R.	5.42	5.32	7.51	6.39	7.06	6.34
Luo	2	A.R.	6.25	7.78	6.19	7.38	7.98	7.11
Lu	3	A.R.	5.77	6.09	6.58	7.65	7.42	6.70
Wang	4	A.R.	5.73	6.81	5.41	4.69	5.59	5.65
Bao	5	A.R.	7.70	6.78	6.80	7.77	6.93	7.20
Ding	6	T.C.	5.57	4.59	6.81	6.19	4.63	5.56
Li	7	T.C.	6.42	7.60	7.47	7.15	8.19	7.37
Chen	8	T.C.	4.04	5.52	5.34	6.14	5.09	5.23
Song	9	T.C.	7.09	6.70	6.64	7.12	6.28	6.77
Ye	10	T.C.	8.41	8.57	5.54	7.68	7.61	7.56

**Facial Dimension(mm)**

Subject	Face length	Face Width	Face Depth	Mouth Width
Chen	125	150	120	58
Lu	115	132	107	48
Zhou	115	135	106	52
Li	125	130	107	46
Luo	125	136	100	43
Zheng	128	140	112	55
Wang	120	147	103	48
Song	120	140	100	50
Bao	130	134	104	50

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 83071443, or email: CN\_Roccheck@sgs.com

3<sup>rd</sup> Building No. 860, Yishan Road, Xuhui District Shanghai, China 200233 1 (86-21) 61402666 1 (86-21) 64958763 www.sgs.com

中国·上海·徐汇区宜山路889号3号楼 邮编: 200233 1 (86-21) 61402666 1 (86-21) 64958763 sgs.china@sgs.com



Ding	134	150	110	52
Liu	120	135	117	50
Ye	126	137	105	52

**Clause 7.9.2 Penetration of Filter Material**  
(EN 149:2001+A1:2009, Clause 8.11 & EN 13274-7:2019)

Test Requirement			Results	Comment
The penetration of the filter of the particle filtering half mask shall meet the requirements of the following table.			Detail refer to Appendix 2	Meet FFP1, Meet FFP2
Classification	Maximum penetration of test aerosol			
	Sodium chloride test 95 l/min	Paraffin oil test 95 l/min		
	% max.	% max.		
FFP1	20	20		
FFP2	6	6		
FFP3	1	1		

**Appendix 2: Summarization of Test Data**

Penetration of filter material

Aerosol	Condition	Sample No.	Penetration (%)
Sodium chloride test	As received	1	0.472
		2	0.545
		3	0.543
	Simulated wearing treatment	4	0.548
		5	0.496
		6	0.493
	Mechanical strength +Temperature conditioned	7	1.863
		8	1.679
		9	1.783
Paraffin oil test	As received	10	3.569
		11	4.139
		12	4.358
	Simulated wearing treatment	13	3.987
		14	3.271
		15	3.507
	Mechanical strength +Temperature conditioned	16	4.371
		17	4.569
		18	5.005

Flow conditioning : Single filter: 95.0 L/min



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 83071443, or email: CN\_Roccheck@sgs.com  
 3<sup>rd</sup> Building No. 860, Yehan Road, Xuhui District Shanghai, China 200233    t (86-21) 61402666    f (86-21) 64958763    www.sgs.com  
 中国·上海·徐汇区宜山路889号3号楼 邮编: 200233    t (86-21) 61402666    f (86-21) 64958763    e sgs.china@sgs.com

**Clause 7.10 Compatibility with Skin**

(EN 149:2001+A1:2009, Clause 8.4 &amp; 8.5)

Test Requirement	Results	Comment
Materials that may come into contact with the wearer's skin shall not be known to be likely to cause irritation or any other adverse effect to health.	No irritation or any other adverse effect to health	Pass

**Clause 7.11 Flammability**

(EN 149:2001+A1:2009, Clause 8.6)

Test Requirement	Results	Comment
The material used shall not present a danger for the wearer and shall not be of highly flammable nature  When tested, the particle filtering half mask shall not burn or not to continue to burn for more than 5 s after removal from the flame.	Detail refer to Appendix 3	Pass

**Appendix 3: Summarization of Test Data**
**Flammability**

Condition	Sample No.	Result
As received	1	NIL
	2	NIL
Temperature conditioned	3	NIL
	4	NIL

**Clause 7.12 Carbon Dioxide Content of The Inhalation Air**

(EN 149:2001+A1:2009, Clause 8.7)

Test Requirement	Results	Comment
The carbon dioxide content of the inhalation air (dead space) shall not exceed an average of 1,0 % (by volume)	Detail refer to Appendix 4	Pass

**Appendix 4: Summarization of Test Data**
**Carbon Dioxide Content of The Inhalation Air**

Condition	Sample No.	Result(%)
As received	1	0.4461
	2	0.4537
	3	0.4518
		Mean value:0.45

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 83071443, or email: CN\_Roccheck@sgs.com

3<sup>rd</sup> Building No. 860, Yehan Road, Xuhui District Shanghai, China 200233 t (86-21) 61402666 f (86-21) 64958763 www.sgs.com

中国·上海·徐汇区宜山路889号3号楼 邮编: 200233 t (86-21) 61402666 f (86-21) 64958763 a sgs.china@sgs.com



**Clause 7.13 Head Harness**

(EN 149:2001+A1:2009, Clause 8.4 &amp; 8.5)

Test Requirement	Results	Comment
The head harness shall be designed so that the particle filtering half mask can be donned and removed easily.	Comply	Pass
The head harness shall be adjustable or self-adjusting and shall be sufficiently robust to hold the particle filtering half mask firmly in position and be capable of maintaining total inward leakage requirements for the device.	Comply	

**Clause 7.14 Field of Vision**

(EN 149:2001+A1:2009, Clause 8.4)

Test Requirement	Results	Comment
The field of vision is acceptable if determined so in practical performance tests.	Comply	Pass

**Clause 7.15 Exhalation Valve(s)**

(EN 149:2001+A1:2009, Clause 8.2 &amp; 8.9.1 &amp; 8.3.4 &amp; 8.8)

Test Requirement	Results	Comment
(a) A particle filtering half mask may have one or more exhalation valve(s), which shall function correctly in all orientations.	Not applicable due to No exhalation valve	N.A.
(b) If an exhalation valve is provided it shall be protected against or be resistant to dirt and mechanical damage and may be shrouded or may include any other device that may be necessary for the particle filtering half mask to comply with 7.9.	Not applicable due to No exhalation valve	
(c) Exhalation valve(s), if fitted, shall continue to operate correctly after a continuous exhalation flow of 300 l/min over a period of 30 s.	Not applicable due to No exhalation valve	
(d) When the exhalation valve housing is attached to the faceblank, it shall withstand axially a tensile force of 10N applied for 10 s.	Not applicable due to No exhalation valve	

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 83071443, or email: [CN.Qoocheek@sgs.com](mailto:CN.Qoocheek@sgs.com)



**Clause 7.16 Breathing Resistance**

(EN 149:2001+A1:2009, Clause 8.9)

Test Requirement				Results	Comment
The penetration of the filter of the particle filtering half mask shall meet the requirements of the following table.				Detail refer to Appendix 5	Meet FFP1, Meet FFP2, Meet FFP3
Classification	Maximum permitted resistance (mbar)				
	Inhalation		Exhalation		
	30 l/min	95 l/min	160 l/min		
FFP1	0.6	2.1	3.0		
FFP2	0.7	2.4	3.0		
FFP3	1.0	3.0	3.0		

**Appendix 5: Summarization of Test Data**

Breathing resistance (mbar)

	Flow rate(l/min)	1					2					3					
		A	B	C	D	E	A	B	C	D	E	A	B	C	D	E	
As received	Inhalation	30	0.2	0.4	0.4	0.3	0.2	0.3	0.4	0.2	0.4	0.3	0.2	0.4	0.3	0.2	0.4
		95	0.8	1.0	1.0	0.9	0.8	0.9	0.8	1.0	0.8	0.9	0.8	0.9	1.0	0.9	0.8
	Exhalation	160	2.1	2.3	2.1	2.2	2.2	2.3	2.3	2.1	2.2	2.3	2.2	2.1	2.3	2.1	2.3
Simulated wearing treatment	Inhalation	30	0.3	0.5	0.4	0.3	0.3	0.4	0.5	0.5	0.4	0.3	0.4	0.4	0.3	0.5	0.4
		95	0.9	1.1	0.9	1.0	1.1	0.9	1.0	1.1	0.9	0.9	1.0	0.9	1.1	0.9	1.0
	Exhalation	160	2.2	2.3	2.4	2.2	2.4	2.3	2.2	2.2	2.3	2.4	2.3	2.3	2.4	2.2	2.4
Temperature conditioned	Inhalation	30	0.2	0.3	0.4	0.2	0.2	0.4	0.2	0.3	0.2	0.4	0.2	0.4	0.2	0.3	0.2
		95	0.7	0.9	0.8	0.9	0.8	0.7	0.7	0.8	0.9	0.8	0.9	0.7	0.9	0.8	0.7
	Exhalation	160	2.1	2.0	2.2	2.1	2.0	2.2	2.1	2.1	2.1	2.2	2.0	2.1	2.0	2.2	2.1

A: facing directly ahead; B: facing vertically upwards; C: facing vertically downwards; D: lying on the left side; E: lying on the right side



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of the Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 83071443, or email: CN\_Roccheck@sgs.com  
 3<sup>rd</sup> Building No. 860, Yehan Road, Xuhai District Shanghai, China 200233    t (86-21) 61402666    f (86-21) 64958763    www.sgs.com  
 中国·上海·徐汇区宜山路889号3号楼 邮编: 200233    t (86-21) 61402666    f (86-21) 64958763    e sgs.china@sgs.com

**Clause 7.17 Clogging**

(EN 149:2001+A1:2009, Clause 8.9 & 8.10)

Test Requirement	Results	Comment																
<p><b>Clause 7.17.2 Breathing resistance</b>  <b>Valved particle filtering half masks:</b>                      After clogging the inhalation resistances shall not exceed:                      FFP1: 4 mbar, FFP2: 5 mbar, FFP3: 7 mbar at 95L/min continuous flow                      The exhalation resistance shall not exceed 3 mbar at 160 L/min continuous flow.</p> <p><b>Valveless particle filtering half masks:</b>                      After clogging the inhalation and exhalation resistances shall not exceed:                      FFP1: 3 mbar, FFP2: 4 mbar, FFP3: 5 mbar at 95L/min continuous flow</p> <p><b>Clause 7.17.3 Penetration of filter material</b>                      All types (valved and valveless) of particle filtering half masks claimed to meet the clogging requirement shall also meet the requirements.</p> <table border="1" data-bbox="148 864 973 1080"> <thead> <tr> <th rowspan="3">Classification</th> <th colspan="2">Maximum penetration of test aerosol</th> </tr> <tr> <th>Sodium chloride test 95 l/min</th> <th>Paraffin oil test 95 l/min</th> </tr> <tr> <th>% max.</th> <th>% max.</th> </tr> </thead> <tbody> <tr> <td>FFP1</td> <td>20</td> <td>20</td> </tr> <tr> <td>FFP2</td> <td>6</td> <td>6</td> </tr> <tr> <td>FFP3</td> <td>1</td> <td>1</td> </tr> </tbody> </table>	Classification	Maximum penetration of test aerosol		Sodium chloride test 95 l/min	Paraffin oil test 95 l/min	% max.	% max.	FFP1	20	20	FFP2	6	6	FFP3	1	1	Optional for single shift device only	N.A.
Classification		Maximum penetration of test aerosol																
		Sodium chloride test 95 l/min	Paraffin oil test 95 l/min															
	% max.	% max.																
FFP1	20	20																
FFP2	6	6																
FFP3	1	1																
Optional for single shift device only	N.A.																	

**Clause 7.18 Demountable Parts**

(EN 149:2001+A1:2009, Clause 8.2)

Test Requirement	Results	Comment
All demountable parts (if fitted) shall be readily connected and secured, where possible by hand	No demountable parts	N.A

Test	Uncertainty
Total inward leakage	3.4%
Penetration of filter material	4.8%
Carbon dioxide content of the inhalation air	3.9%
Breathing resistance (30L/min)	5.9%
Breathing resistance (95L/min)	4.9%
Breathing resistance (160L/min)	4.3%



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
 Attention: To check the authenticity of testing / inspection report & certificates, please contact us at telephone: (86-755) 8307 1443, or email: CN.Qqcchina@sgs.com

3<sup>rd</sup> Building No. 888, Yeshan Road, Xuhai District Shanghai, China 200233    t (86-21) 61402666    f (86-21) 64958763    www.sgs.com.cn  
 中国·上海·徐汇区宜山路889号3号楼 邮编: 200233    t (86-21) 61402666    f (86-21) 64958763    sgs.china@sgs.com

Sample Photo



\*\*\*End of Report\*\*\*

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 83075443, or email: CN.Roccheck@sgs.com



3<sup>rd</sup> Building No. 869, Yehan Road, Xuhai District Shanghai, China 200233  
中国·上海·徐汇区宜山路889号3号楼 邮编: 200233

t (86-21) 61402666 f (86-21) 64958763  
t (86-21) 61402666 f (86-21) 64958763

www.sgs.com  
a sgs.china@sgs.com