



Model name : 443147

Executive Div.	Safety Center	Confidential	
	Name / Title	Signature	Date
Reported by	Kim Hyansuk		2016.5.16
Approved by	Kim Lan		2016.5.16

Test report; UN Manual of Tests and Criteria,
Part III, Subsection 38.3

2013, Rev.5, Amend.2

Document No : SDI-UN-P160516-01

SAMSUNG SDI
Energy Business Division



Product Information

- 1. Model name: 443147**
- 2. Product classification: Li rechargeable battery pack (10S-2P)**
- 3. Nominal voltage: 36.5V**
- 4. Rated capacity: 5200mAh**
- 5. Wh Capacity: 189.8Wh**
- 6. Weight of product: 1408g**
- 7. Test Date: 2015.04.15 ~2015.04.30**
- 8. Test Location: SAMSUNG SDI Safety Center, 508 Sungsungdong, Cheonan
Chungcheongnamdo, Korea**

Test summary

Test No.	Test item	Relating Std.	Test begins on (YYYY/MM/DD)	Test Completed on (YYYY/MM/DD)	Judgment (Pass/Fail)
T1	Altitude simulation	UN Manual of Tests and Criteria, Part III, Subsection 38.3.4.1	2015/04/16	2015/04/16	Pass
T2	Thermal test	UN Manual of Tests and Criteria, Part III, Subsection 38.3.4.2	2015/04/17	2015/04/23	Pass
T3	Vibration	UN Manual of Tests and Criteria, Part III, Subsection 38.3.4.3	2015/04/24	2015/04/24	Pass
T4	Shock	UN Manual of Tests and Criteria, Part III, Subsection 38.3.4.4	2015/04/27	2015/04/27	Pass
T5	External short circuit	UN Manual of Tests and Criteria, Part III, Subsection 38.3.4.5	2015/04/28	2015/04/28	Pass
T6	Impact / Crush	UN Manual of Tests and Criteria, Part III, Subsection 38.3.4.6	2012/05/04	2012/05/04	Pass
T7	Overcharge	UN Manual of Tests and Criteria, Part III, Subsection 38.3.4.7	2015/04/16	2015/04/24	Pass
T8	Forced discharge	UN Manual of Tests and Criteria, Part III, Subsection 38.3.4.8	2012/04/30	2012/05/07	Pass
Total Judgment(Pass/Fail)					Pass

- Tests T-1 through T-5 shall be conducted in sequence with the same cell/pack/single cell battery.
- For test 6, test should be conducted for Li-ion cells or component cell contained in a battery.
- T7 shall be performed only for Li-ion rechargeable battery or rechargeable single cell battery not cell.
- T8 should be conducted for Li-ion cells or component cell contained in a battery.

T-1~T-5) Transportation Test (Test Result: Pass)

Fresh pack 100% SOC							50 cycled pack 100% SOC							
Initial							Initial							
No.	Weight(g)	OCV(V)					No.	Weight(g)	OCV(V)					
1	1405.50	36.30					1	1405.25	36.30					
2	1406.30	36.30					2	1407.15	36.30					
3	1406.79	36.30					3	1407.65	36.30					
4	1405.04	36.29					4	1406.82	36.31					
T1							T1							
No.	Weight(g)	OCV(V)	Mass Loss(%)	Residual OCV(%)	Appearance	Result	No.	Weight(g)	OCV(V)	Mass Loss(%)	Residual OCV(%)	Appearance	Result	
1	1405.50	36.30	0.00	100.00	O	Pass	1	1405.25	36.30	0.00	100.00	O	Pass	
2	1406.30	36.29	0.00	99.97	O	Pass	2	1407.15	36.30	0.00	100.00	O	Pass	
3	1406.78	36.30	0.00	100.00	O	Pass	3	1407.64	36.30	0.00	100.00	O	Pass	
4	1405.04	36.29	0.00	100.00	O	Pass	4	1406.82	36.31	0.00	100.00	O	Pass	
T2							T2							
No.	Weight(g)	OCV(V)	Mass Loss(%)	Residual OCV(%)	Appearance	Result	No.	Weight(g)	OCV(V)	Mass Loss(%)	Residual OCV(%)	Appearance	Result	
1	1405.49	36.14	0.00	99.56	O	Pass	1	1405.25	36.14	0.00	99.56	O	Pass	
2	1406.30	36.14	0.00	99.59	O	Pass	2	1407.15	36.14	0.00	99.56	O	Pass	
3	1406.78	36.14	0.00	99.56	O	Pass	3	1407.64	36.14	0.00	99.56	O	Pass	
4	1405.04	36.13	0.00	99.56	O	Pass	4	1406.81	36.14	0.00	99.53	O	Pass	
T3							T3							
No.	Weight(g)	OCV(V)	Mass Loss(%)	Residual OCV(%)	Appearance	Result	No.	Weight(g)	OCV(V)	Mass Loss(%)	Residual OCV(%)	Appearance	Result	
1	1405.49	36.13	0.00	99.97	O	Pass	1	1405.25	36.14	0.00	100.00	O	Pass	
2	1406.30	36.14	0.00	100.00	O	Pass	2	1407.15	36.14	0.00	100.00	O	Pass	
3	1406.78	36.13	0.00	99.97	O	Pass	3	1407.64	36.13	0.00	99.97	O	Pass	
4	1405.04	36.13	0.00	100.00	O	Pass	4	1406.81	36.13	0.00	99.97	O	Pass	
T4							T4							
No.	Weight(g)	OCV(V)	Mass Loss(%)	Residual OCV(%)	Appearance	Result	No.	Weight(g)	OCV(V)	Mass Loss(%)	Residual OCV(%)	Appearance	Result	
1	1405.49	36.13	0.00	100.00	O	Pass	1	1405.25	36.13	0.00	99.97	O	Pass	
2	1406.30	36.13	0.00	99.97	O	Pass	2	1407.15	36.14	0.00	100.00	O	Pass	
3	1406.78	36.13	0.00	100.00	O	Pass	3	1407.64	36.13	0.00	100.00	O	Pass	
4	1405.03	36.13	0.00	100.00	O	Pass	4	1406.81	36.13	0.00	100.00	O	Pass	
T5							T5							
No.	Max T(°C)	Appearance				Result	No.	Max T(°C)	Appearance				Result	
1	55	O				Pass	1	55	O				Pass	
2	55	O				Pass	2	55	O				Pass	
3	55	O				Pass	3	55	O				Pass	
4	55	O				Pass	4	55	O				Pass	

[Appearance] O-No Leakage, No Venting, No Disassembly, No Rupture, No Fire / L-Leakage / V-Venting / D-Disassembly / R-Rupture / F-Fire

[Criteria] T1~T4: No Leakage / No Venting / No Disassembly / No Rupture / No Fire / Residual OCV not less than 90%

T5: External temperature does not exceed 170°C, no disassembly, no rupture, and no fire within 6 hours of this test

T-6) Impact/Crush Test (Test Result: Pass)

■ Cell type

Cylindrical cells not less than 18.0 mm in diameter

Prismatic, Pouch, Cylindrical cells less than 18.0 mm in diameter

■ Test procedure

Impact

Crush

Fresh Cell 50% SOC				
	Initial	T6		
No.	OCV(V)	Max Temp(°C)	Appearance	Result
1	3.71	21.4	0	PASS
2	3.71	28.9	0	PASS
3	3.71	21.2	0	PASS
4	3.71	23.2	0	PASS
5	3.71	21.2	0	PASS
[Appearance] O-No Disassembly, No Fire / D-Disassembly / F-Fire				
[Criteria] External temperature does not exceed 170°C, no disassembly, and no fire within 6 hours of this test.				

T-7) Over charge Test (Test Result: Pass)

■ Test condition: 49.2V / 10.4A / 24Hr

Fresh pack 100% SOC			50 cycled cell 100% SOC	
No.	Appearance	Result	Appearance	Result
1	0	PASS	0	PASS
2	0	PASS	0	PASS
3	0	PASS	0	PASS
4	0	PASS	0	PASS

[Appearance] O-No Disassembly, No Fire / D-Disassembly / F-Fire
[Criteria] No disassembly and no fire within 7 days of the test

T-8) Forced discharge Test (Test Result: Pass)

■ Test condition:

- Initial test current: 2.75A

- Time interval: 1Hr

Fresh cell 0% SOC				50 cycled cell 0% SOC		
No.	Max. tempe(°C)	Appearance	Result	Max. temp(°C)	Appearance	Result
1	79.3	0	PASS	74.0	0	PASS
2	74.1	0	PASS	72.7	0	PASS
3	76.8	0	PASS	76.1	0	PASS
4	74.8	0	PASS	70.4	0	PASS
5	74.3	0	PASS	73.1	0	PASS
6	75.7	0	PASS	73.3	0	PASS
7	76.9	0	PASS	71.9	0	PASS
8	72.9	0	PASS	72.2	0	PASS
9	66.9	0	PASS	44.5	0	PASS
10	72.6	0	PASS	69.4	0	PASS

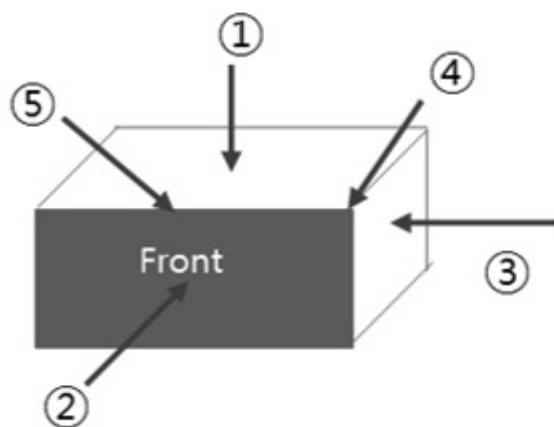
[Appearance] O-No Disassembly, No Fire / D-Disassembly / F-Fire
[Criteria] No disassembly and no fire within 7 days of the test

Annex 1 - 1.2m Packaging Drop Test

■ Test Summary

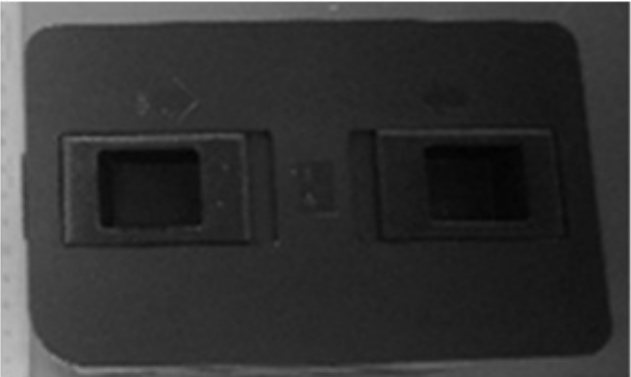

Test No.	Test item	Relating Std.	Test begins on (YYYY/MM/DD)	Test Completed on (YYYY/MM/DD)	Judgment (Pass/Fail)
P1	Packaging Drop	IATA Dangerous Goods Regulations	2016/05/13	2016/05/13	Pass
Total Judgment(Pass/Fail)					Pass

■ Test Method



P-1 1.2m Packaging Drop Test (Test Result: Pass)



■ Sample Information

	Front	Back
Picture		

Battery Qty per box	Battery weight (kg)	Net weight per box (kg)
6	1.4	8.4

P-1 1.2m Packaging Drop Test (Test Result: Pass)

■ Test result

	Before Test	After Test
Weight (Kg)	9.76	9.76
Test Result		
Remark	Outer packaging is damaged but samples inside the package remain intact and no damage, no shifting, no release of contents for samples inside the package.	
Criteria	<ul style="list-style-type: none">- Without damage to cells or batteries contained therein.- Without shifting of the contents so as to allow battery to battery(or Cell to cell) contact.- Without release of contents.	